

## Chapter 1

### 1.1

Mass of water =  $10^6$  g, temperature raised by  $20^\circ C$ .

Heat needed  $Q = 2 \times 10^7 \text{ cal} = 8.37 \times 10^7 \text{ J} = 23.2 \text{ kwh}$ .

Work needed =  $mgh = 14 \times 150 \times 29000 = 6.09 \times 10^7 \text{ ft-lb} = 22.9 \text{ kwh}$ .

### 1.2

Work done along various paths are as follows

*ab*:

$$\int_a^b P dV = Nk_B T_1 \int_a^b \frac{dV}{V} = Nk_B T_1 \ln \frac{V_b}{V_a}$$

*cd*:

$$P_d(V_d - V_b) = Nk_B T_3 \left(1 - \frac{V_b}{V_d}\right)$$

*de*:

$$Nk_B T_3 \int_d^e \frac{dV}{V} = Nk_B T_3 \ln \frac{V_a}{V_d}$$

No work is done along *bc* and *ea*. The total work done is the sum of the above. Heat absorbed equals total work done, since internal energy is unchanged in a closed cycle.

### 1.3

(a)

$$\alpha = \frac{1}{V} \frac{\partial V}{\partial T} = \frac{bV_0 T^{b-1}}{T_0^b V}$$

(b)

$$\Delta V = \frac{bV_0 T^{b-1}}{T_0^b} \Delta T$$

$$P = \frac{Nk_B T}{V} = \frac{Nk_B T_0^b}{V_0} T^{1-b}$$

$$\text{Work done} = P \Delta V = bNk_B \Delta T$$

1.4

Consider an element of the column of gas, of unit cross section, and height between  $z$  and  $z+dz$ . The weight of the element is  $-gdM$ , where  $dM$  is the mass of the element:  $dM = mndz$ , where  $m$  is the molecular mass, and  $n = P/k_B T$  is the local density, with  $P$  the pressure. For equilibrium, the weight must equal the pressure differential:  $dP = -gdM$ . Thus,  $dP/P = -(mg/k_B T)dz$ . At constant  $T$ , we have  $dp/P = dn/n$ . Therefore

$$n(z) = n(0)e^{-mgz/k_B T}$$

1.5

No change in internal energy, and no work is done. Therefore total heat absorbed  $\Delta Q = \Delta Q_1 + \Delta Q_2 = 0$ . That is, heat just pass from one body to the other. Suppose the final temperature is  $T$ . Then

$\Delta Q_1 = C_1(T - T_1)$ ,  $\Delta Q_2 = C_2(T - T_2)$ . Therefore

$$T = \frac{C_1 T_1 + C_2 T_2}{C_1 + C_2}$$

1.6

Work done by the system is  $-\int H dM$ . Thus the work on the system is

$$\int H dM = \frac{\kappa}{T} \int H dH = \frac{\kappa H^2}{2T}$$

1.7

Consider the hysteresis cycle in the sense indicated in Fig.1.6. Solve for the magnetic field:


$$H = \pm H_0 + \tanh^{-1}(M/M_0)$$

(+ for lower branch, - for upper branch.). Using  $W = -\int H dM$ , we obtain

$$\begin{aligned} W &= -\int_{-M_0}^{M_0} dM [H_0 + \tanh^{-1}(M/M_0)] - \int_{M_0}^{-M_0} dM [-H_0 + \tanh^{-1}(M/M_0)] \\ &= -4M_0 H_0 \end{aligned}$$

1.8

A log log plot of mass vs.  $A$  is shown in the following graph. The dashed line is a straightline for reference.

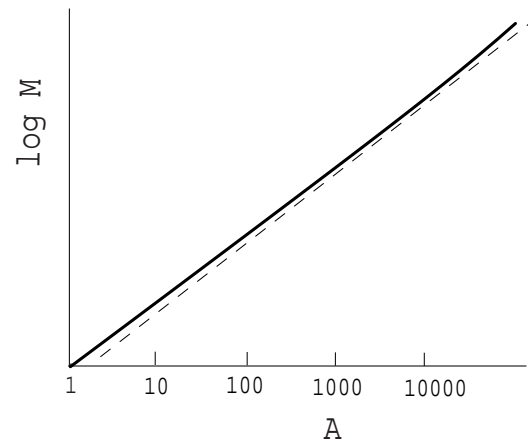



## Chapter 2

### 2.1

Use the  $dQ$  equation with  $P, T$  as independent variables:

$$dQ = C_P dT + [(\partial U / \partial P)_T + P(\partial V / \partial P)_T] dP$$

For an ideal gas  $(\partial U / \partial P)_T = 0$ ,  $P(\partial V / \partial P)_T = -V$ . Thus

$$dQ = C_P dT - V dP.$$

The heat capacity is given by

$$C = C_P - V(\partial P / \partial T)_{\text{path}}.$$

The path is  $P = aV^b$ , or equivalently  $P^{b+1} = a(Nk_B T)^b$  by the equation of state. Hence

$$V(\partial P / \partial T)_{\text{path}} = [ab/(b+1)]V(Nk_B T)^b T^{-1} = bNk_B/(b+1). \text{ Therefore}$$

$$C = C_P - \frac{b}{b+1} Nk_B$$

This correctly reduces to  $C_P$  for  $b = 0$ .

### 2.2

Use a Carnot engine to extract energy from 1 gram of water between 300 K and 290 K.

Max efficiency  $\eta = 1 - (290/300) = 1/30$ .

$$W = \eta C \Delta T = \frac{1}{30} (4.164 \text{ J g}^{-1} \text{K}^{-1} \times 1 \text{ g} \times 10 \text{ K}) = 1.39 \text{ J}$$

$$\text{Gravitational potential energy} = 1 \text{ g} \times 9.8 \text{ kg s}^{-2} \times 110 \text{ m} = 1.08 \text{ J}$$

### 2.3

The highest and lowest available temperatures are,  $600 \text{ F} = 588.7 \text{ K}$  and  $70 \text{ F} = 294.3 \text{ K}$ .

The efficiency of the power plant is  $W/Q_1 = 0.6[1 - (294.3/588.7)] = 0.3$ .

In one second:  $W = 10^6 \text{ J}$ .

So  $Q_2 = 2.33 \times 10^6 \text{ J} = C_V \Delta T$ . Use  $C_V = 4.184 \text{ J g}^{-1} \text{K}^{-1}$ ,